

General Relay

Main technical parameter

Specifications		Model	MY4	LY1	LY2
Terminal layout			4Z	1Z	2Z
Contact capacity	AC		3A 250V	15A 250V	10A 250V
	DC		3A 30V	15A 30V	10A 30V
Contact resistance(mΩ)			≤50mΩ	≤50mΩ	≤50mΩ
Insulation resistance(MΩ)			≥100MΩ	≥100MΩ	≥100MΩ
Dielectric strength	BOC		1000VAC	1000VAC	1000VAC
	BCC		1500VAC	1500VAC	1500VAC
Coil nominal voltage	AC		6 to 240V	6 to 240V	6 to 240V
	DC		6 to 220V	6 to 220V	6 to 220V
Coil nominal power	AC		0.9VA to 1.2VA	0.9VA to 1.2VA	0.9VA to 1.2VA
	DC		≤0.9W	≤0.9W	≤0.9W
Electrical life(OPS)			10 ⁵	10 ⁵	10 ⁵
Mechanical life(OPS)			10 ⁷	10 ⁷	10 ⁷
Operating temperature(°C)			-40~+60	-40~+60	-40~+60
Weight(g)			≤35	≤35	≤35
Mounting methods			Printed-circuit board, Outlet	Printed-circuit board, Flange,Outlet	Printed-circuit board, Flange,Outlet



MY4




LY1




LY2


Dimension

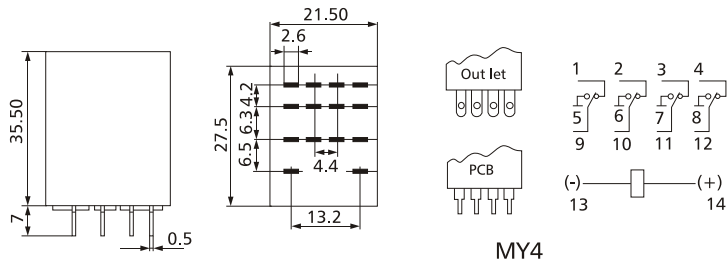

MY4

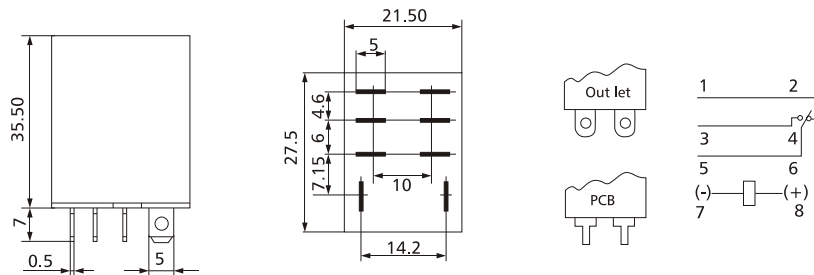

LY1

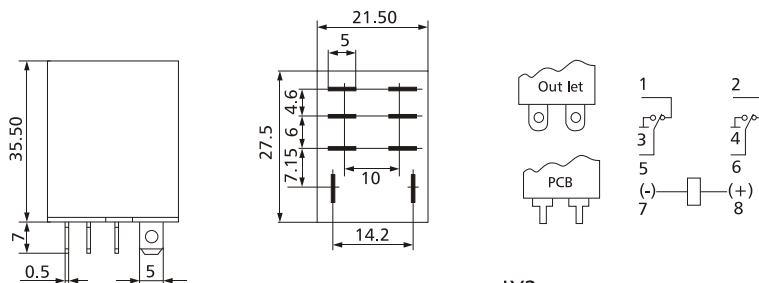

LY2