

LLB4-100H Mini Circuit Breaker

Application

The product, used to protect line-conductor and overload, and short-circuit of small scale motors, is mainly for protection of circuits with AC 220V and 50Hz/60Hz, and for unfrequent conversion under normal conditions as well, Its action can be as up to 22-pole with its only one pole volume and it can be used as a leakage breaker by assembling with leakage.



LLB4 1P



LLB4 2P



LLB4 3P




LLB4 4P

Sepecification

Rated voltage:220V
Rated current:2,4,6,10,25,32a
Breaking capacity:3KA
Mechanical and electrical life:6000 times
Width pole:P+N= ∅ 18mm
According to standards:IEC898-7 GB10963-89 B.S3871

Dimension (mm)

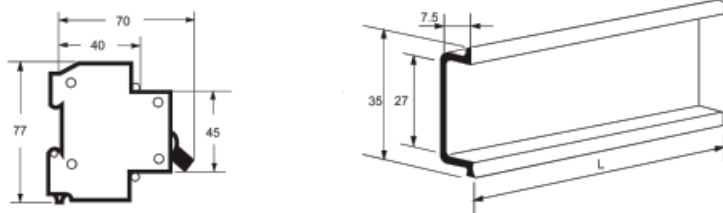

Sepecification

Rated current(A)	Pole number(P)	Rated voltage(V)	Breaking capacity(A)
50 63 82 100	1	130	20000
		230/240	10000
		400/415	4000
50 63 82 100	2,3,4	230/240	20000
		400/415	10000
		440	6000

NC100H/L/LH/LS/B

