

◎ 用途 USAGE




JBK系列机床控制变压器适用于交流50-60Hz,输入电压不超过660V的电路中,作为各类机床、机械设备等一般电器的控制电源、局部照明及指示灯的电源。


本系列变压器是其它控制变压更新换代的产品,采用进口材料和先进工艺进行制造,具有工作可靠,耗能人低,体积小,接线安全,适用性广等到制点。

JBK series machine tool control transformer for AC 50-60Hz, input voltage less than 660V circuit, as the various types of machine tools, Machinery and equipment to control the general electric power supply, local lighting and light power.

This series is the other control substation transformer replacemant products, using imported materials and advanced technology of manufacturing, with the work Be reliable, the low energy, small size, wiring safety, wait until the system point of wide applicability


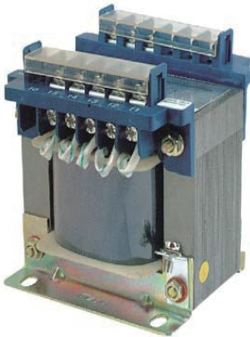


◎ 型号及其含义 MODEL AND MEANING

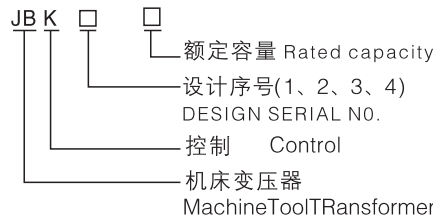


◎ 外形尺寸及安装尺寸 SHAPE SIZE AND INSTALLATION SIZE

JBK3系列产品的外形及安装尺寸 JBK3 product shape and size of the installation

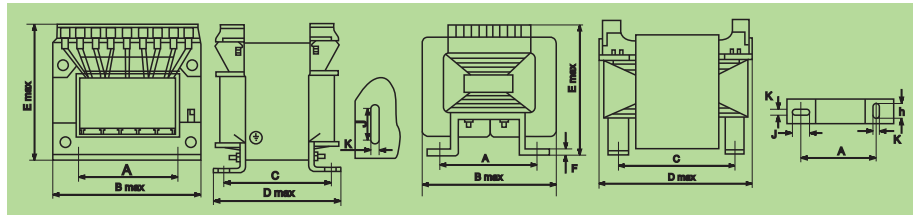

JBK3-40~80

JBK3-1000~2500



型号 TYPE	外形尺寸 SHAPE and SIZE 安装孔距 Distance to install					安装孔 Installation hole k×J
	B max	Dmax	E max	A	C	
JBK3-40	78	70	86	56±0.5	51±3	4.8×9
JBK3-63	78	70	86	56±0.5	51±2	4.8×9
JBK3-100	85	85	93	64±0.5	67±0.5	4.8×9
JBK3-160	96	90	103	84±0.5	74±2	5.8×11
JBK3-250	96	105	103	84±0.5	88±2	5.8×11
JBK3-300	96	115	114	84±0.5	96±2	5.8×11
JBK3-400	120	113	123	90±0.5	90±2	7×13
JBK3-630	150	118	145	122±0.5	86±2	7×13
JBK3-800	150	128	145	122±0.5	100±2	7×13
JBK3-1000	155	205	145	127.5±2	152±2	7×12卧式
JBK3-1600	180	230	160	140±2	176±2	7×12卧式
JBK3-2500	205	260	175	173±2	200±2	7×12卧式