


## S-N Series AC Contactor

### Application

S-N series AC contactors are suitable for AC 50Hz, rated voltage up to 660V, mainly used as putting through long distance, breaking circuit and frequently starting control AC motor. It can also be used for counter-connection breaking of squirrel-cage motor in the case of reducing working current.

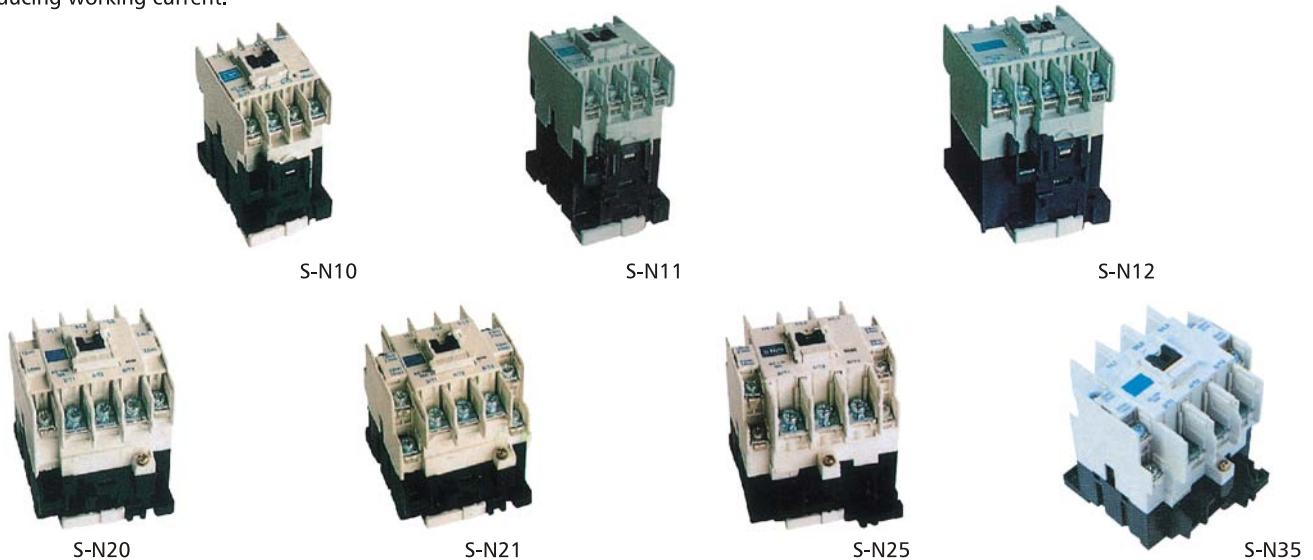

### Technical Specification:

Type	Capacity of 3 phase squirrel-cage motor AC-3								Rated heating current 1th
	Rated power (KW)				Rated operating current (A)				
	220V-240V	380V-440V	550V	660V	220V-240V	380V-440V	550V	660V	
S-N10	2.5	4.0	4.0	4.0	11	9	7	5	20
S-N11	3.5	5.5	5.5	5.5	13	12	9	7	20
S-N12	3.5	5.5	5.5	5.5	13	12	9	7	20
S-N20	5.5	11	11	7.5	22	22	17	9	40
S-N21	5.5	11	11	7.5	22	22	17	9	40
S-N25	8.5	14	14	14	30	30	12	12	50
S-N35	12	20	20	20	40	40	17	17	70

## TM Series Modular Contactor



Standard control voltage(V)	20-230, 50/60Hz
Current ratings for AC1(A)	20,25,32,40,63
Number of poles	1P,2P,4P
Ambient temperature(°C)	-25~+55
Connection capacity	tunnel terminal for cables up to 25mm