


LLAS3 Photo Controls

LLAS3-T

- ⊙ Thermal photo control
- ⊙ Rated voltage: 120V/220V/~/ (applicable 110V,127V,230V,250V)
- ⊙ Rated frequency: 50/60Hz
- ⊙ Rated current: 10A,15A
- ⊙ Load: 1000-2000W TUNGSTEN
- ⊙ Light level: on/off; 10-16LUX/50-80LUX
- ⊙ Acting time: 30" ~180"
- ⊙ Temperature range: -40℃~+70℃
- ⊙ Electrical life: >6500CYCLES

Exterior dimension(mm)

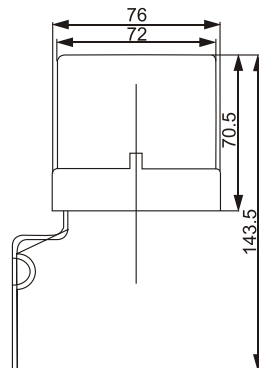

LLAS3 10A,15A

LLAS3-E

- ⊙ Electronic Photo Control
- ⊙ Rated voltage: 120/240V~(applicable 105-250V~)
- ⊙ Rated frequency: 50/60Hz
- ⊙ Rated current: 10A 15A
- ⊙ Load: Load: 1000-2000W TUNGSTEN
- ⊙ Light level: ON/OFF;10-16LUX/20-30LUX or at customers'option
- ⊙ Acting time: <15"
- ⊙ Temperature range: -40℃~+70℃
- ⊙ Electrical life: >6000CYCLES

LLAS4 Photo Controls




LLAS4-1 10A



LLAS4-2 10A

Exterior dimension(mm)

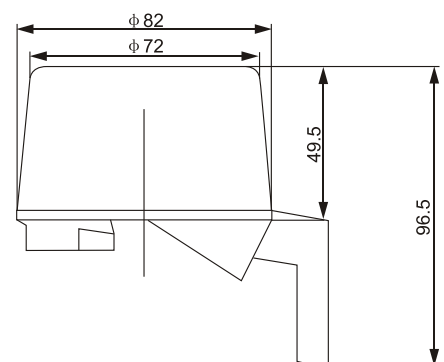

LLAS4

- ⊙ Electronic Photo Control
- ⊙ Rated voltage: 120/240V~(applicable 105-305V~)
- ⊙ Rated frequency: 50/60Hz
- ⊙ Rated current: 10A 15A
- ⊙ Load: Load: 1000-2000W TUNGSTEN
- ⊙ Light level: ON/OFF;10-16LUX/20-30LUX or at customers'option
- ⊙ Acting time: <15"
- ⊙ Temperature range: -40℃~+70℃
- ⊙ Electrical life:> 6000CYCLES